

## Technical data model TPM

Model	EAN-No. 4025092*	Flat material capacity** max. kg	Material thickness min. at max. capacity mm	Flat material length of material max. mm	Round material capacity** max. kg	Round material diameter mm	Round material length of material max. mm	Test load kg	Weight kg
TPM 0,1	*558853	100	14	2000	50	200 - 300	2000	300	6.8
TPM 0,3	*558860	300	20	2500	150	200 - 300	2500	900	15.5
TPM 0,5	*558877	500	24	3000	250	200 - 400	3000	1500	30.6
TPM 0,8	*558884	800	34	3500	400	200 - 400	3500	2400	56.0
TPM 1,0	*558891	1000	40	3500	500	200 - 400	3500	3000	61.0
TPM 2,0	*190367	2000	55	3500	1000	200 - 400	3500	6000	126.0

\*\*gemessen auf ziehblankem Material St 37

## Dimensions model TPM

Model	TPM 0,1	TPM 0,3	TPM 0,5	TPM 0,8	TPM 1,0	TPM 2,0
A, mm	122	192	232	302	332	392
B, mm	69	95	120	154	154	196
C, mm	185	225	270	320	320	420
D, mm	160	250	250	450	450	450




Diagram: WLL/air gap







Diagram: WLL/material thickness

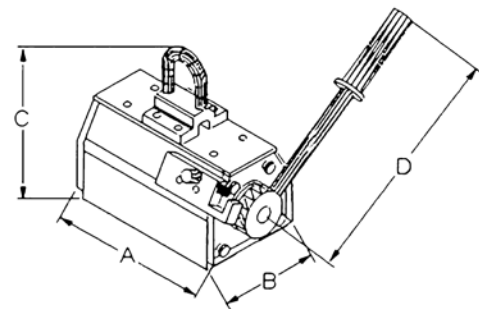

Model TPM



Correct use On/Off



Reduction of capacity	% of capacity
Temperature ≤ 60 °C	100 %
Humidity ≤ 80 %	100 %
St 52	95 %
Alloy steel	80 %
High carbon steel	70 %
Cast iron	45 %
Nickel	45 %
Austenitic, stainless steel	0 %
Brass	0 %
Aluminium	0 %

